


|  |   |   |  |  |   |                            |   |
|--|---|---|--|--|---|----------------------------|---|
| 8  | 7   | 6   | 5  | 4  | 3   | 2                          | 1 |
| <b>AVAILABLE ACCESSORIES</b><br>- DOUBLE SIDED TAPES<br>- EPOXY ATTACHMENT<br>- THERMAL GREASE<br>- THERMAL INTERFACE MATERIALS<br>- ATTACHMENT CLIP & ANCHORS | <b>FINISHES</b><br>- BLACK ANODIZE<br>(OTHER COLORS ON REQUEST)<br>- CHROMATE (CLEAR & GOLD)<br>- CLEAN OR MILL FINISH<br>- PAINTING AND POWDERCOAT | <b>OPTIONS</b><br>- CROSS CUT<br>- CUSTOM MACHINING<br>- PART MARKING<br>- BAR CODING | <b>SIMULATION AND ANALYSIS</b><br>- THERMAL ANALYSIS<br>- CFD MODELING FOR SYSTEM AND<br>COMPONENT LEVELS<br>- PARAMETRIC MODELING | <b>MANUFACTURING</b><br>- CNC MACHINING<br>- SHEET METAL<br>- PROTOTYPE & PRODUCTION<br>- CUSTOM EXTRUSION PROFILES<br>AND STAMPINGS | <b>WEB SITE LINKS</b><br><a href="http://www.heatsinks.com">HTTP://www.heatsinks.com</a><br><a href="http://www.allaxismachining.com">HTTP://www.allaxismachining.com</a> | <b>THERMAL PERFORMANCE</b> |   |

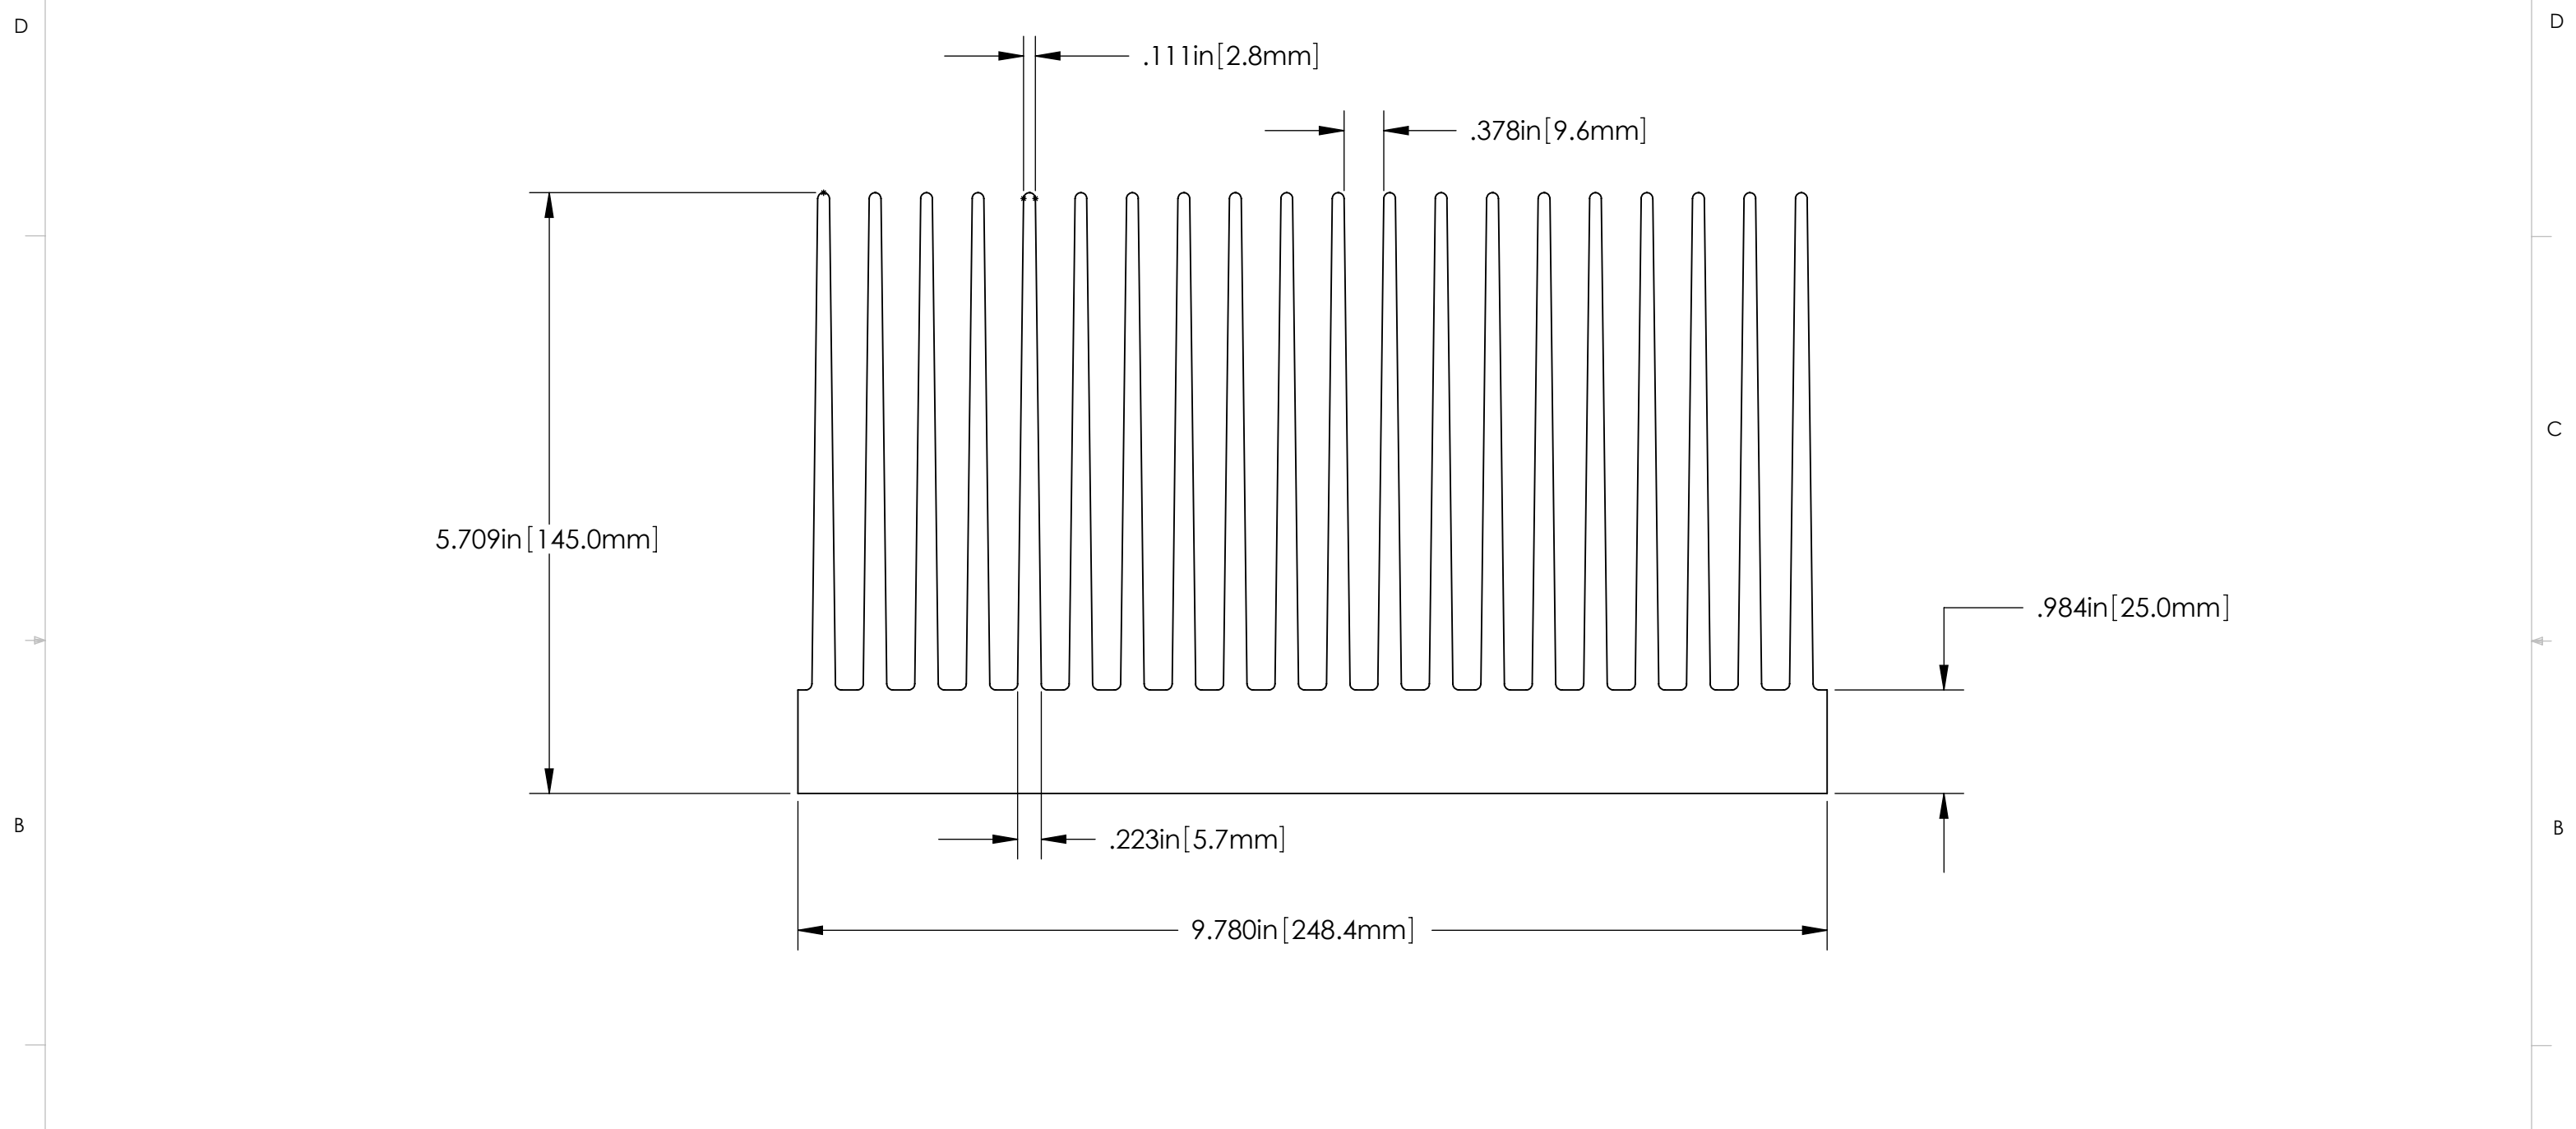

Notes:  
 1. Finish - None  
 2. Material: Extrusions: 6063 Aluminum;  
 3. Physical Properties: Mass = 29.75 lbs/ft; 44.28 Kg/m  
 Perimeter = 206.32 inches; 524.05 cm  
 4. All Dimensions Shown on Print are for Reference Only, Contact Factory for  
 any Critical to Function Tolerances such as flatness, height, width, diameter, distance, etc.

**ROHS Compliant Certification - EU Directive 2002/95/EC**

| Material Name   | Maximum Concentration by Weight |
|---|---------------------------------|
| Cadmium and its Compounds                               | < 0.01%                         |
| Mercury and its Compounds                               | < 0.01%                         |
| Lead and its Compounds                                  | < 0.01%                         |
| Hexavalent Chromium CR+6<br>and its compounds           | < 0.01%                         |
| Polybrominated Bi-phenyls (PBB)                         | < 0.01%                         |
| Polybrominated Diphenyl Ethers/<br>Oxides (PBDE & PBDO) | < 0.01%                         |
| Polychlorinated Biphenyls                               | 0%                              |
| Polychlorinated Terphenyls                              | 0%                              |
| Abestos (All Forms)                                     | 0%                              |



**Uncontrolled  
Drawing**

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
DRAWING IS COPYRIGHTED 2007 AND IS  
THE SOLE PROPERTY OF ALL AXIS  
MACHINING ANY REPRODUCTION IN  
PART OR AS A WHOLE WITHOUT THE  
WRITTEN PERMISSION OF ALL AXIS  
MACHINING IS PROHIBITED.

DIMENSIONS AND TOLERANCES  
EXTRUDED FEATURES PER ALUMINUM  
INDUSTRY STANDARDS

COMMENTS:

**CAD FILES AND DYNAMIC  
THERMAL MODELS ARE  
AVAILABLE FOR DOWNLOAD  
FROM WEBSITE**

www.heatsinks.com  
 Email: gkuzmin@heatsinks.com  
 Phone: 972 312 8609 Fax: 972 312 8617



Part Number:

**E2332**